




**APPLIED COMPANIES
STAINLESS STEEL SAMPLE CYLINDERS**

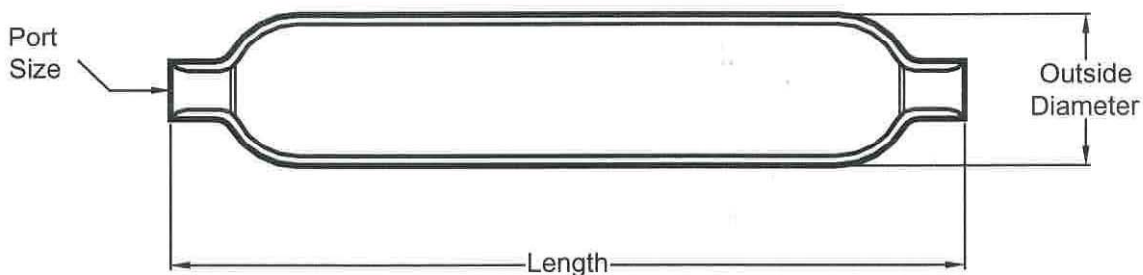

Capacity: (Cubic Centimeters Nominal)	Part No.		DOT Rating	Max Length (Inches)	Max Outside Diameter (Inches)	Female Pipe Ends (NPT)	Average Weight (lbs.)
	Single Ended	Double Ended					
75	APP75S-SS	APP75D-SS	3E1800	5.00"	1.52"	¼"-18	0.6
150	APP150S-SS	APP150D-SS	3E1800	8.38"	1.52"	¼"-18	1.0
300	APP300S-SS	APP300D-SS	3E1800	9.00"	2.02"	¼"-18	1.8
500	APP500S-SS	APP500D-SS	3E1800	14.0"	2.02"	¼"-18	2.5
1000	APP1000S-SS	APP1000D-SS	3A1800	9.69"	4.02"	¼"-18	7.5
2250	APP2250S-SS	APP2250D-SS	3A1800	16.59"	4.02"	¼"-18	12.0
1 Gallon	APP1GS-SS	APP1GD-SS	3A1800	25.69"	4.02"	½"-14	17.8

**AVAILABLE MATERIALS: 316L OR 304L STAINLESS STEEL
and HASTELLOY or INCONEL**

Service Pressure: 1,800 psi

Proof Test Pressure: 3,000 psi

Burst Pressure: 6,000 psi

28020 Avenue Stanford Valencia, California 91355-1105 (661) 257-0090 FAX (661) 257-3770
E-Mail: info@appliedcompanies.net